

# H1 MAILBOX DATASHEET

Green Quarter




The H1 range of mailboxes, are available in single, double, and triple height variations. This range of mailboxes have been designed for versatile use both internally and externally (with the addition of weather cladding).

Each model in the H1 range conforms to EN13724 standards and complies with the Secured by Design Homes 2025 guidelines (requiring the use of an additional gap restrictor or extended internal bridge) as well as Class 0 (BS476: Part 6 & 7) fire safety standards.

The mailboxes can be wall-recessed, wall-mounted, or installed freestanding, offering flexibility to meet various installation requirements.

## DIMENSIONS

APERTURE SIZE (MM): 21.5H X 235W

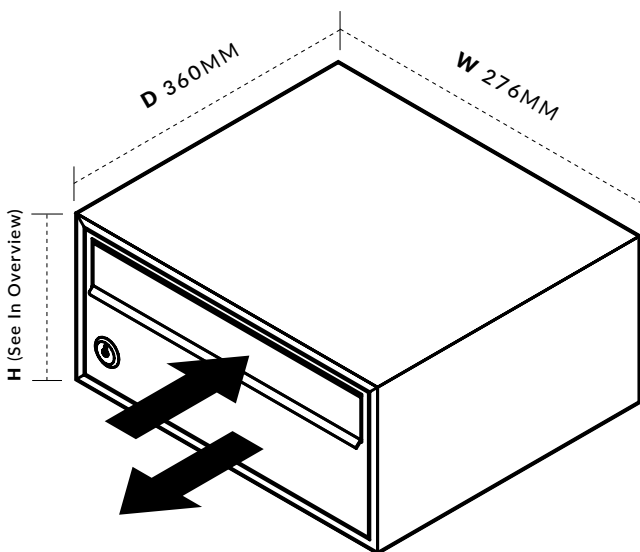

\*Single box dimension as per base box height

## MAILBOX FEATURES:

### Overview

- Three models and dimensions available (mm):
  - **H1: 107H x 276W x 360D (base box 117H)**
  - **H1 Double Height: 214H x 276W x 360D (base box 224H)**
  - **H1 Triple Height: 321H x 276W x 360D (base box 331H)**
- Aperture Size (mm): All Models: 19.5H x 235W
- All models will accept A4 Mail

### Finishes

- Zintec Steel
- Polyester powder coating paint
- Available in all standard RAL colours as standard
- Option to upgrade to any RAL colour for an additional fee

### Installation Options

- Bankable options: **up to 12 high on H1, 6 high on H1 Double Height and 4 high on H1 Triple height**, no restrictions on width
- Can also be used as a single box\*
- Freestanding – on support legs or table
- Recessed or Wall Mounted
- Bespoke Arrangement

### Applications

- Suitable for internal and external use (with additional weather cladding)

### Compliance

- BS EN13724 Compliant
- Class 0 (BS476 : Part 6 & 7)
- Conforms to Secured by Design Homes 2025 guidelines

### Accessories/Optional Extra

- Can be engraved or fitted with Vinyl lettering
- Aperture restrictors
- Identification labels

